


Date:

Project Name:

SD-3C with Optimal Mounting Clamp

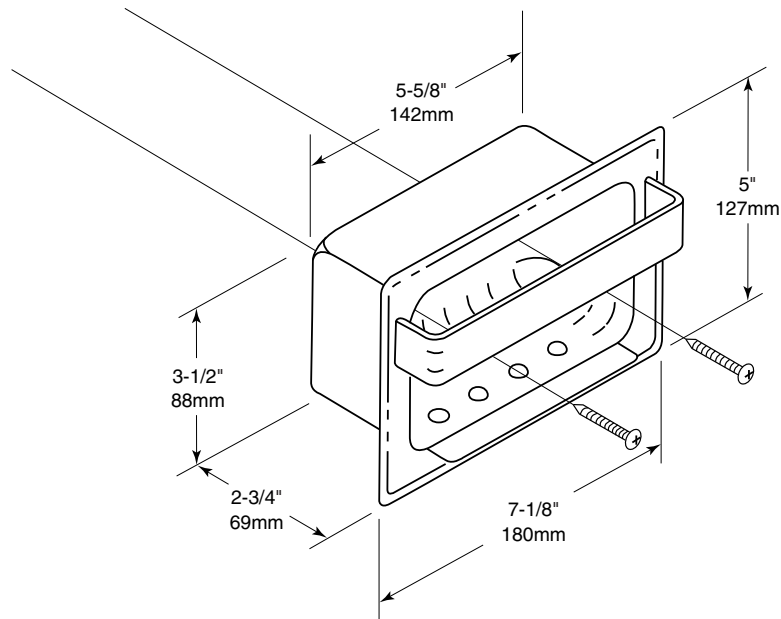

Rough Wall Opening:
6" (152mm) Wide
3-3/4" (95mm) High
2-3/4" (70mm) minimum
recessed depth

CONSTRUCTION:

One piece, deep drawn, 20-gauge (1mm) stainless steel. Raised dimples with bar.

INSTALLATION:

If wood blocking is available, install recess shell into opening using 2- #8 x 1-1/4" (32mm) flathead stainless steel screws provided. If wood blocking is not available, use optional SD recess wall clamp.

OVERALL DIMENSIONS:

7-1/8" W x 5" H (180 x 127mm) bar projects 1-3/8" (35mm) from wall.

Recessed Soap Dish with Bar shall be Model SD-3 of GAMCO Commercial Restroom Accessories, A Division of Bobrick, One Gamco Place, Durant, OK