


Date:

Project Name:

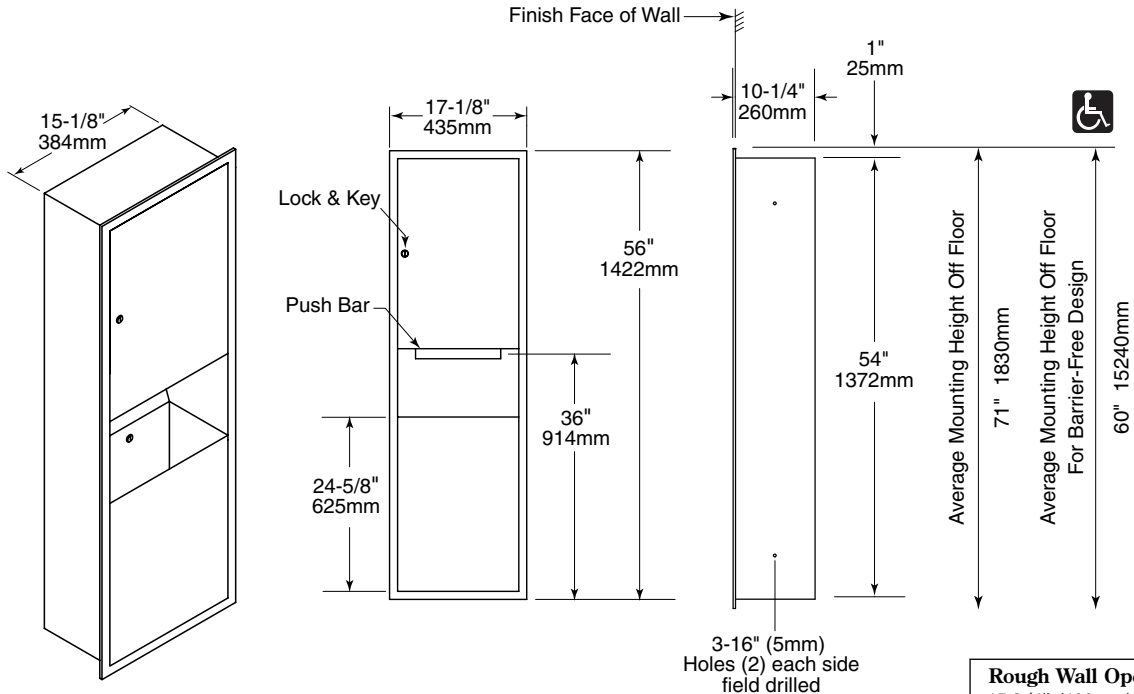

<p>Rough Wall Opening 15-3/4" (400mm) Wide 54-3/4" (1391mm) High 10" (254mm) minimum recessed depth</p>
--

CONSTRUCTION:

Unit fabricated of type 304 stainless steel with exposed surfaces having a satin-finish. One piece seamless 22-gauge (0.8mm) flange provided with 1/4" (6mm) return for rigidity. EXTRA HEAVY 18-gauge (1.2mm) door, warp free, hung on continuous piano hinge, and fitted with tumbler lock; keyed like other Gamco accessories. Waste receptacle is 22-gauge (0.8mm) and secured to cabinet with tumbler lock and is removable for servicing. All welded construction. Interior shelf for stocking supplies.

CAPACITY:

Accepts universal roll paper. 7-3/4" to 8" (197 to 203mm) wide up to 8" (203mm) in diameter. 1-1/2" to 2" (38 to 51mm) core. Waste capacity is 16-gallons (60.5-L).

OVERALL DIMENSIONS:

17-1/8" W x 56" H x 10-1/4" D (435 x 1422 x 260mm)

INFRARED SPECIFICATIONS:

- Towels are dispensed automatically when hands are placed below dispenser
- Large detection zone for easy and reliable operation
- Towels are not exposed at all
- Smooth and quiet delivery
- Easy to load paper
- Operates on 4 each "D" size alkaline batteries
- Battery life can exceed 36,000 hand dries
- Optional electrical hard wire kit is available
- Stub roll transfer system to eliminate paper waste
- Individually adjustable modes for paper saving, time delay and sheet length

Recessed Automatic Roll Towel Dispenser and Waste Receptacle shall be Model TW-10RPT of GAMCO Commercial Restroom Accessories, A Division of Bobrick, One Gamco Place, Durant, OK