




WR-8 Recessed Waste Receptacle

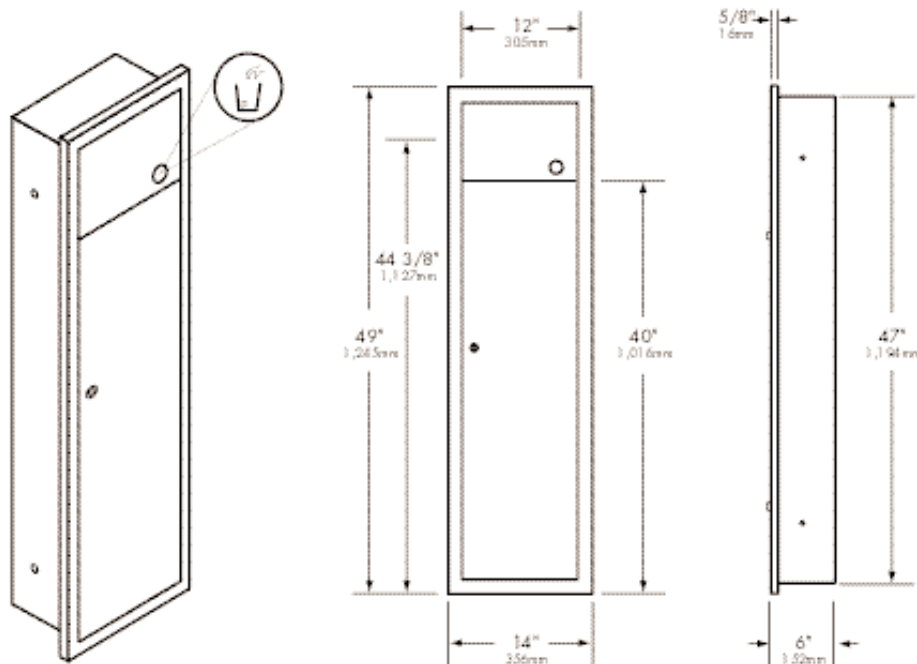

Construction:

Unit fabricated of type 304 stainless steel. All welded construction with exposed surfaces satin finished. One piece seamless 22 (.8mm) gauge with 1/4" (6mm) return for rigidity. EXTRA HEAVY 18 (1.2mm) gauge door, warp free, hung on continuous stainless steel piano hinge, and fitted with tumbler lock. Stainless inner container, capacity 3 gallons. Self closing push door mounted on continuous stainless steel piano hinge. All welded construction.

Installation:

Provide framed wall opening of 12-1/2" (318mm)W x 47-1/2" (1,207mm)H. Recessed depth required from finish face of wall is 6" (152mm) deep. Check plans and coordinate with mechanical engineers to avoid protrusion from opposite wall, pipes, conduits, electrical wires, etc. If installing in plaster wall, recommend grounding. If installing where unit projects above top of wainscot, provide filler to prevent gap from finished wall and flange of unit. If installing in block walls, use metal expansion shields.

Overall Dimensions:

14"W x 49"H x 6"D
(356mm) x (1,245mm) x (152mm)

Wall Opening:

12-1/2"W x 47-1/2"H x 6"min depth
(318mm) x (1,207mm) x (152mm)

Mounting:

52" (1,321mm) to top of unit

ADA Guide:

Access to paper towels should be 15" (381mm) to 48" (1,219mm) above the finish floor to allow forward and side reach by people in wheelchairs. Hinged panels covering waste receptacle openings should not require more than 5 pounds of force to open. Units should not project more than 4" (102mm) from the wall. Operable with one hand and without tight grasping, pinching, or twisting of the wrist. Activation of lever should not require more than 5 pounds of force when unit is completely filled.

Manufacturer reserves the right to make changes in design or dimensions without formal notice.