


Date:

Project Name:

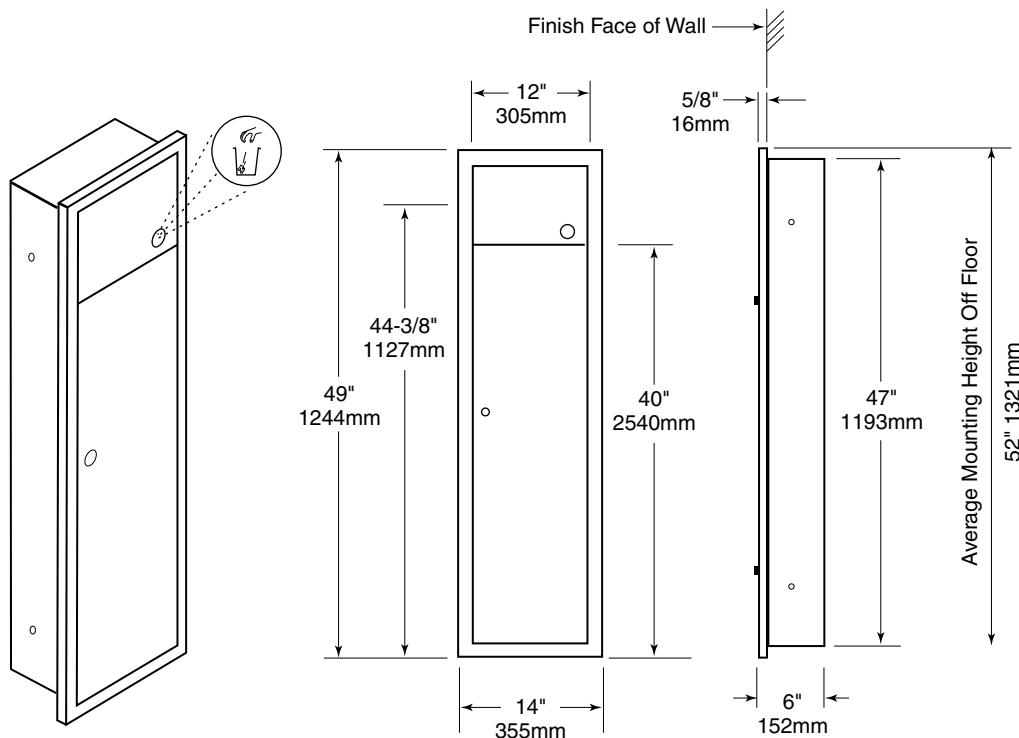

<p><b>Rough Wall Opening</b> 12-1/2" (318mm) Wide 47-1/2" (1207mm) High 6" (152mm) minimum recessed depth</p>
---

**CONSTRUCTION:**

Unit fabricated of type 304 stainless steel. All welded construction with exposed surfaces having a satin-finish. One piece seamless 22-gauge (.8mm) with 1/4" (6mm) return for rigidity. EXTRA HEAVY 18-gauge (1.2mm) door, warp free, hung on continuous stainless steel piano hinge, and fitted with tumbler lock. Stainless steel inner container. Self-closing push door mounted on continuous stainless steel.

**CAPACITY:**

10-gallons (38-L)

**INSTALLATION:**

Provide framed wall opening of 12-1/2" W x 47-1/2" H (318 x 1207mm). Recessed depth required from finish face of wall is 6" (152mm) deep. Check plans and coordinate with mechanical engineers to avoid protrusion from opposite wall, pipes, conduits, electrical wires, etc. If installing in plaster wall, recommend grounding. If installing where unit projects above top of wainscot, provide filler to prevent gap from finished wall and flange of unit. If installing in block walls, use metal expansion shields.

**ADA GUIDE:**

Hinged panels covering waste receptacle openings should not require more than 5 pounds of force to open. Units should not project more than 4" (102mm) from the wall. Operable with one hand and without tight grasping, pinching, or twisting of the wrist.

**Recessed Waste Receptacle shall be Receptacle Model WR-8 of GAMCO Commercial Restroom Accessories, A Division of Bobrick, One Gamco Place, Durant, OK**