


WR-9 Coverall Waste Receptacle

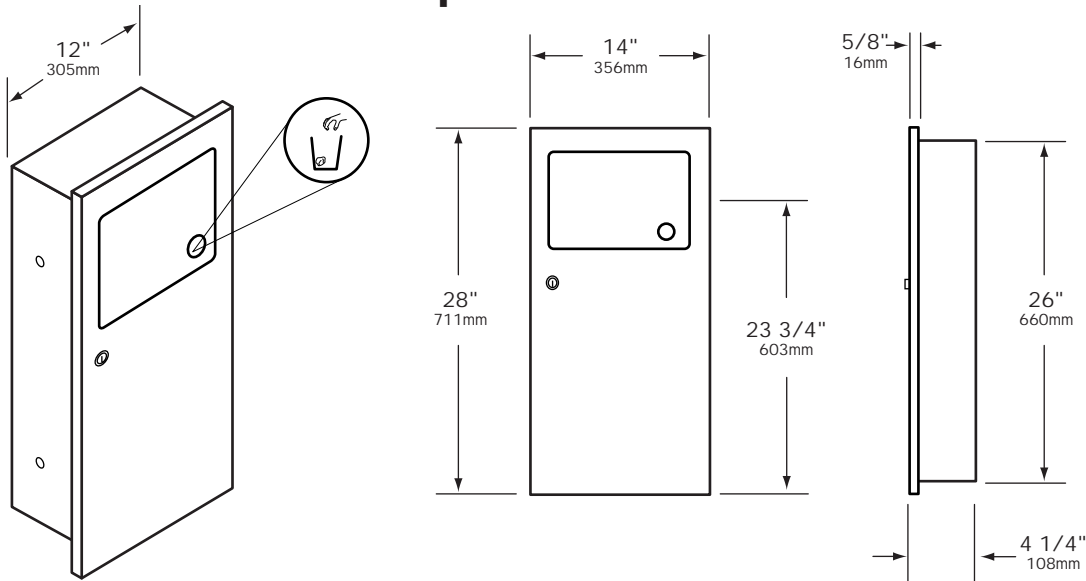

Construction:

Unit fabricated of 18-8 type 304 stainless steel. All welded construction with exposed surfaces #4 satin finished. One piece seamless door construction, Extra heavy 18 gauge (1.2mm) with 5/8" (16mm) return for rigidity. Door is mounted to cabinet with continuous stainless steel piano hinge and fitted with tumbler lock. Self closing push door mounted on continuous stainless steel piano hinge. Stainless steel inner container capacity 3 gallons. All welded construction.

Installation:

Provide framed wall opening of 12-1/2" (318mm)W. Recessed depth required from finish face of wall is 3-3/4" (95mm) deep. Check plans and coordinate with mechanical engineers to avoid protrusion from opposite wall, pipes, conduits, electrical wires, etc. If installing in plaster wall, recommend grounding. If installing where unit projects above top of wainscot, provide filler to prevent gap from finished wall and flange of unit. If installing in block walls, use metal expansion shields.

Overall Dimensions:

14"W x 28"H x 4-1/4"D
(356mm) x (711mm) x (108mm)

Wall Opening:

12-1/2"W x 26-1/2"H x 3-3/4"min depth
(318mm) x (673mm) x (95mm)

Mounting:

52" (1,321mm) to top of unit, 38" (965mm) for handicapped

ADA Guide:

Access to paper towels should be 15" (381mm) to 48" (1,219mm) above the finish floor to allow forward and side reach by people in wheelchairs. Hinged panels covering waste receptacle openings should not require more than 5 pounds of force to open. Units should not project more than 4" (102mm) from the wall. Operable with one hand and without tight grasping, pinching, or twisting of the wrist. Activation of lever should not require more than 5 pounds of force when unit is completely filled.

Options:

WR-9F Same as WR-9 except with 2" (51mm) skirt for semi-recessing
WR-9FS Same as WR-9 except with 4" (103mm) skirt for surface mounting

Manufacturer reserves the right to make changes in design or dimensions without formal notice.