
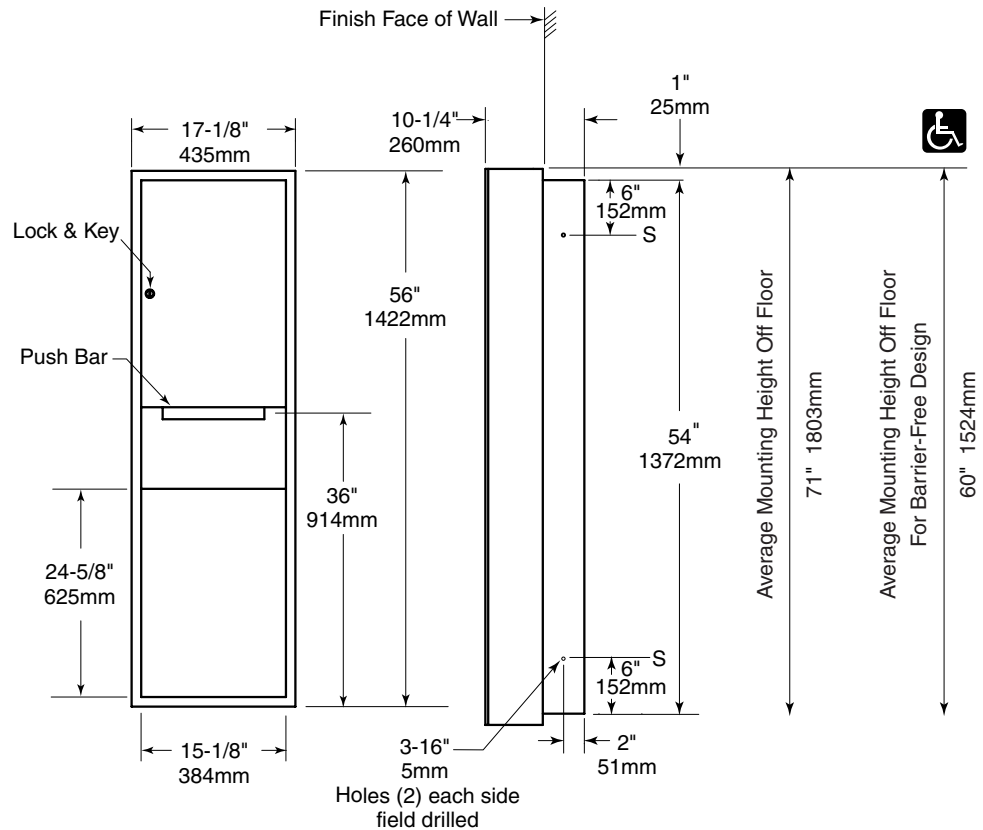


Date:

Project Name:

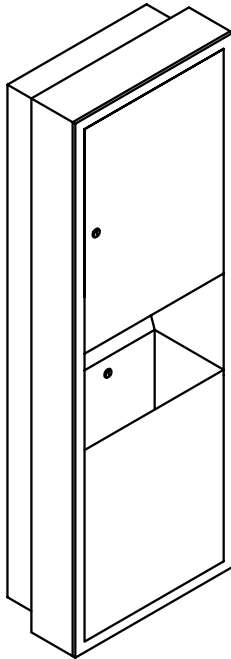

Rough Wall Opening

15-3/4" (400mm) Wide
54-3/4" (1391mm) High
4" (102mm) minimum
recessed depth

CONSTRUCTION:

Unit fabricated of type 304 stainless steel with exposed surfaces having a satin-finish. One piece seamless 22-gauge (0.8mm) flange provided with 1/4" (6mm) return for rigidity. EXTRA HEAVY 18-gauge (1.2mm) door, warp free, hung on continuous stainless steel piano-hinge, and fitted with tumbler lock; keyed like other GAMCO accessories. Waste receptacle is 22-gauge (0.8mm) and secured to cabinet with tumbler lock and is removable for servicing. Interior shelf for stocking supplies. All welded construction.

CAPACITY:

Accepts universal roll paper 7-3/4" to 8" (197 to 203mm) wide up to 8" (203mm) in diameter. 1-1/2" to 2" (38 to 51mm) core. Waste capacity is 16-gallons (60.6-L).

OVERALL DIMENSIONS:

17-1/8" W x 56" H x 10-1/4" D (435 x 1422 x 260mm)

Semi-Recessed Roll Towel Dispenser and Waste Receptacle Push Bar Roll Towel Dispenser shall be Model TW-10 RP-F of GAMCO Commercial Restroom Accessories, A Division of Bobrick, One Gamco Place, Durant, OK