
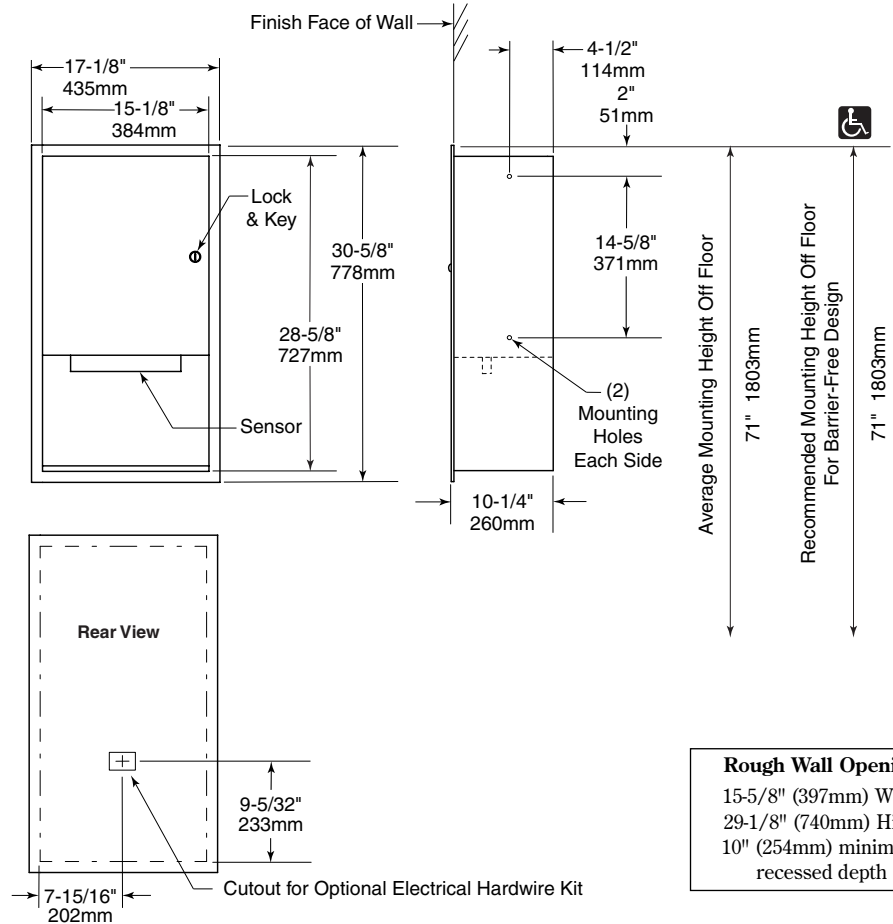


Date:

Project Name:

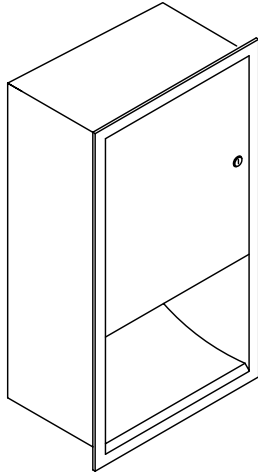

**Rough Wall Opening**  
15-5/8" (397mm) Wide  
29-1/8" (740mm) High  
10" (254mm) minimum  
recessed depth

**CONSTRUCTION:**

Unit fabricated of type 304 stainless steel with exposed surfaces having a satin-finish. One piece seamless flange with 1/4" (6mm) return for rigidity. EXTRA HEAVY 18-gauge (1.2mm) door mounted to cabinet with full length stainless steel piano hinge and fitted with keyed alike tumbler lock to match all other GAMCO accessories. All welded construction.

**SYSTEM FEATURES:**

Infrared Dispenser Specification:

- Towels are dispensed automatically when hands are placed below dispenser
- Large detection zone for easy and reliable operation
- Towels are not exposed at all
- Smooth and quiet delivery
- Easy to load paper
- Operates on 4 each "D" size alkaline batteries
- Battery life can exceed 36,000 hand dries
- Optional electrical hard wire kit is available
- Stub roll transfer system to eliminate paper waste
- Individually adjustable modes for paper saving, time delay and sheet length

**CAPACITY:**

Accepts universal roll paper 7-3/4" to 8" (197 x 203mm) wide and up to 8" (203mm) in diameter. 1-1/2" to 2" (38 x 51mm) core.

**OVERALL DIMENSIONS:**

17-1/8" W x 30-5/8" H x 10-1/4" D (435 x 778 x 260mm)

**Recessed Automatic Touchless Roll Towel Dispenser shall be Model TD-10RPT of GAMCO Commercial Restroom Accessories, A Division of Bobrick, One Gamco Place, Durant, OK**